



## Technical Data Sheet

### U-PAD GROUND 6mm Protection layer

#### COMPONENTS

The U-PAD GROUND is composed of 2 pieces.

#### CHARACTERISTICS

Thickness of the pads: 6 mm

Dimensions: 200 x 200 x 6 mm

Weight: 0,18 kg

Weight/ m<sup>2</sup>: 4,35 kg/ m<sup>2</sup>


Material: Coated PU rubber granulate

Tension under pressure: 0,55 N/mm<sup>2</sup> (55 T/m<sup>2</sup>) for a deformation of 25 %  
(following DIN EN ISO 3386/2)

Building material class: E following EN 13501-1

Plasticizer migration: When laying on membranes that are not compatible with rubber, there is a risk of migration of plasticizers

Temperature range: -40 °C to 120 °C

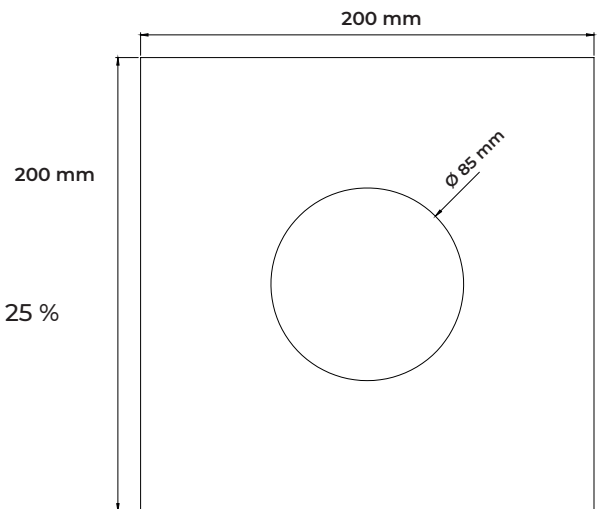


#### PACKAGING

Packaging U-PAD-GROUND 200 x 100 x 6 mm

Pieces per carton: 24 pcs

Carton weight: 4,32 kg

Carton dimension: 400 x 200 x 77 mm



#### APPLICATIONS

The **U-PAD Ground** and the **U-TABS FLAT** form a combination of products.

The combination of accessories help to build terraces when the height available under the paver is limited between 3 and 17 mm. The system guarantees a flat terrace with a good distribution of the laying surface.

#### SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

